



**CI292112**  
**Flex induction cooktop 200 series**  
**Stainless steel frame**  
**Width 90 cm**

Sturdy stainless steel frame  
Flex function for combining the rectangular cooking areas  
Free positioning of cookware inside combined cooking areas  
Professional cooking function for splitting the cooktop into predefined heat areas  
Cooking sensor function for temperature control in pots  
Frying sensor function for temperature control in pans  
Large cooking zone for pots up to ø 32 cm  
Twist-Pad control with removable magnetic knob  
Easy control of all functions with bicoloured display

**Cooking zones**  
2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).  
1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

**Handling**  
Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

**Features**  
Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.  
Cooktop-based ventilation control (with suitable hood).  
Home network integration for digital services (Home Connect) wireless via WiFi.  
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: [home-connect.com](http://home-connect.com).

**Safety**  
Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

**Planning notes**

**Characteristics**  
**Product name/family**  
Cooking zone ceramic  
**Construction type**  
Built-in  
**Energy input**  
Electric  
**Total number of positions that can be used at the same time**  
5  
**Type of control setting devices**  
**Required niche size for installation (HxWxD)**  
55 x 880-880 x 490-490  
**Width of the appliance**  
908  
**Dimensions**  
55 x 908 x 520  
**Dimensions of the packed product (HxWxD)**  
125 x 1070 x 600  
**Net weight**  
22.753  
**Gross weight**  
24.5  
**Residual heat indicator**  
Separate  
**Location of control panel**  
Hob front  
**Type of external control possibility**  
**Basic surface material**  
Ceramic  
**Color of surface**  
Black, Stainless steel  
**Color of frame**  
Stainless steel  
**Approval certificates**  
AENOR, CE  
**Length electrical supply cord**  
150  
**Knob Material**  
Full metal  
**Sealed Burners**  
No  
**heating with booster**  
All  
**Type of pan support**  
**Natural Gas Connection Rating**  
**LP Gas Connection Rating**  
**Dimension of 1st heating element (in)**  
**Power of heating element (kW)**  
**Power of 1st burner**  
**Dimension of 2nd heating element (in)**  
**Power of 2nd heating element (kW)**  
3.3  
**Power of 2nd burner**  
**Dimension of 3rd heating element (in)**  
**Power of 3rd heating element (kW)**  
**Power of 3rd burner (BTU)**  
**Dimension of 4th heating element (in)**  
**Power of 4th heating element (kW)**  
**Power of 4th burner (BTU)**  
**Dimension of 5th heating element (in)**  
**Power of 5th heating element (kW)**  
**Power of 5th burner**  
**Dimension of 6th heating element (in)**  
**Power of heating element (kW in boost)**  
[3.7]  
3.7  
**Power of 3rd heating element (kW in boost)**  
**Power of 4th heating element (kW in boost)**  
**Power of 5th heating element (kW in boost)**  
**Power of 6th heating element (kW in boost)**  
3.7  
**Connection rating**  
11100  
**Gas connection rating**  
**Fuse protection**  
**Voltage**  
220-240  
**Frequency**  
50-60  
**Universal Product Code**  
**Main colour of product**  
Black  
**Energy input**  
Electric

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 23 kg.


**Connection**  
Total connected load 11.1 KW.  
Connecting cable 1.5 m without plug.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.

**Color Variants**

CI292112  
Stainless steel frame  
Width 90 cm

**Optional accessories**

CA051300  
Teppan Yaki plate made of multi ply material  
CA052300  
Griddle plate in cast aluminium  
CA060300  
Cooking sensor for temperature regulation within pots  
CA230100  
Black magnetic knob for induction cooktop 200 series  
GP900001  
Stainless steel frying sensor pan  
GP900002  
Stainless steel frying sensor pan  
GP900003  
Stainless steel frying sensor pan  
GP900004  
Stainless steel frying sensor pan

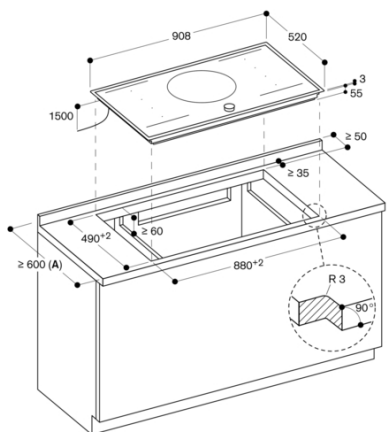

A: Please check the installation manual if the worktop depth is less than 600 mm.  
measurements in mm